

UCA

ULTRA COMPONENTS AND ACCESSORIES

FEATURES:

- REPLACEMENT COMPONENTS INCLUDING LED LUMINAIRES, LED DRIVERS, DIMMER SWITCHES AND FUSES FOR PRODUCTS WITH INTEGRATED LIGHTING
- REPLACEMENT FABRICATED FACE ASSEMBLIES FOR ULTRASUITE



PRICE | **CRITICAL ENVIRONMENTS**

PROJECT:

271927

Revision: B

02-03-2022

UCA

ULTRA COMPONENTS AND ACCESSORIES LED STRIPS

	NOMINAL SIZE	LENGTH (L)	COLOR RENDERING INDEX (CRI)	CORRELATED COLOR TEMPERATURE (CCT)	P/N
<input type="checkbox"/>	2 FT	20.433	95+	4300K	019550-005
<input type="checkbox"/>	3 FT	32.756	95+	4300K	019550-006
<input type="checkbox"/>	4 FT	45.039	95+	4300K	019550-007
<input type="checkbox"/>	2 FT	20.433	95+	5000K	019550-008
<input type="checkbox"/>	3 FT	32.756	95+	5000K	019550-009
<input type="checkbox"/>	4 FT	45.039	95+	5000K	019550-010




*L80 > 60,000
hours*



*IP67 Sealed
LED*

NOTES:

- UL 2108: LOW VOLTAGE LIGHTING SYSTEM
- IP67 RATED INGRESS PROTECTION AGAINST DUST AND LIQUIDS
- LED STRIPS COME WITH M8 QUICK CONNECTORS ON BOTH ENDS

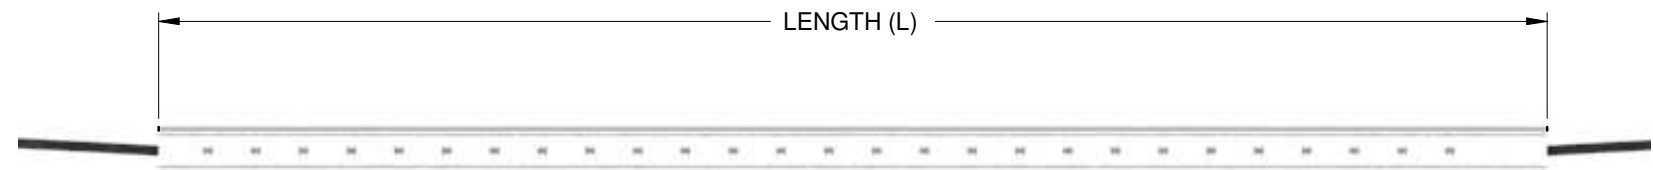

PRICE | **CRITICAL ENVIRONMENTS**

PROJECT:

271927

Revision: B

02-03-2022

UCA

ULTRA COMPONENTS AND ACCESSORIES LED DRIVERS

□ DRIVER TYPE B (P/N 019551-001)

- INPUT
 - 120-277V~
 - 50/60 Hz
 - 0.92A @ 120V~
 - 0.40A @ 277V~

- OUTPUT
 - 24VDC
 - 4A MAX

- FLICKER-FREE DIMMING FROM 100% TO 0.1%
- HIGH VOLTAGE DIMMING
- UL 1310: CLASS 2 POWER UNITS
- UL 8750: LIGHT EMITTING DIODE (LED) EQUIPMENT FOR USE IN LIGHTING PRODUCTS




□ DRIVER TYPE C (P/N 019551-002)

- INPUT
 - 120-277V~
 - 50/60 Hz
 - 1.2A @ 120V~
 - 0.5A @ 277V~

- OUTPUT
 - 24VDC
 - 4A MAX

- FLICKER-FREE DIMMING FROM 100% TO 10% WITH RELAY SHUTOFF
- 0-10VDC DIMMING
- UL 1310: CLASS 2 POWER UNITS
- UL 8750: LIGHT EMITTING DIODE (LED) EQUIPMENT FOR USE IN LIGHTING PRODUCTS

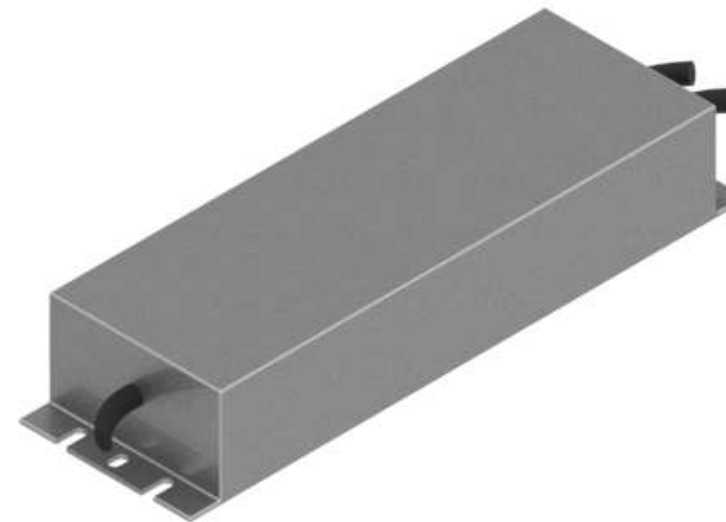

□ DRIVER TYPE D (P/N 019551-003)

- INPUT
 - 120-277V~
 - 50/60 Hz
 - 7A @ 120V~
 - 2.9A @ 277V~

- OUTPUT
 - 24VDC
 - 25A MAX

- FLICKER-FREE DIMMING FROM 100% TO 10%, SHUTOFF @ 0VDC DIMMING SIGNAL
- 0-10VDC DIMMING
- UL 8750: LIGHT EMITTING DIODE (LED) EQUIPMENT FOR USE IN LIGHTING PRODUCTS



PRICE | **CRITICAL ENVIRONMENTS**

PROJECT:

271927

Revision: B

02-03-2022

UCA

ULTRA COMPONENTS AND ACCESSORIES

DIMMER SWITCHES

DIMMER TYPE A (P/N 019552-001)

- 3-WIRE, SINGLE POLE
- 120V~
- 16A LOAD CAPACITY
- HIGH VOLTAGE DIMMING
- COLOR: WHITE
- SLIDE-TO-OFF DIMMER

DIMMER TYPE C (P/N 019552-003)

- SINGLE POLE
- 120-277V~
- 8A LOAD CAPACITY
- 0-10V DIMMING
- COLOR: WHITE
- SLIDE-TO-OFF DIMMER

DIMMER TYPE B (P/N 019552-002)

- 3-WIRE, SINGLE POLE
- 277V~
- 8A LOAD CAPACITY
- HIGH VOLTAGE DIMMING
- COLOR: WHITE
- SLIDE-TO-OFF DIMMER

DIMMER TYPE D (P/N 019552-004)

- MASTER
- SINGLE POLE
- 120-277V~
- 16A LOAD CAPACITY
- 0-10V DIMMING
- COLOR: WHITE
- SLIDE TO DIM, WITH A BUILT-IN ON/OFF SWITCH

NOTES:

- UL LISTED
- CSA CERTIFIED
- NOM CERTIFIED



DIMMER TYPE A, B, C



DIMMER TYPE D

FUSES

CLASS CC 4A FUSE (P/N 019122-001)

- CLASS CC, FAST ACTING, 4A FUSE



PRICE | **CRITICAL ENVIRONMENTS**

PROJECT:

271927

Revision: B

02-03-2022




UCA

ULTRA COMPONENTS AND ACCESSORIES ULTRASUITE DIFFUSER FACE ASSEMBLY

	NOMINAL UNIT SIZE	WIDTH (W)	LENGTH (L)	P/N
☐	2x2	24.250	24.250	505835-001
☐	2x3	24.250	36.375	505835-003
☐	2x4	24.250	48.500	505835-002

NOTES:

- EXTRUDED ALUMINUM DIFFUSER FACE FRAME
- PERFORATED POLYCARBONATE DIFFUSER FACE, 13% FREE AREA
- B12 STANDARD WHITE FACE FRAME FINISH
- COUNTERSUNK FLATHEAD MACHINE SCREWS SECURED ON THE FACE

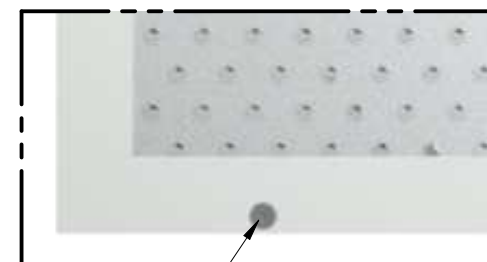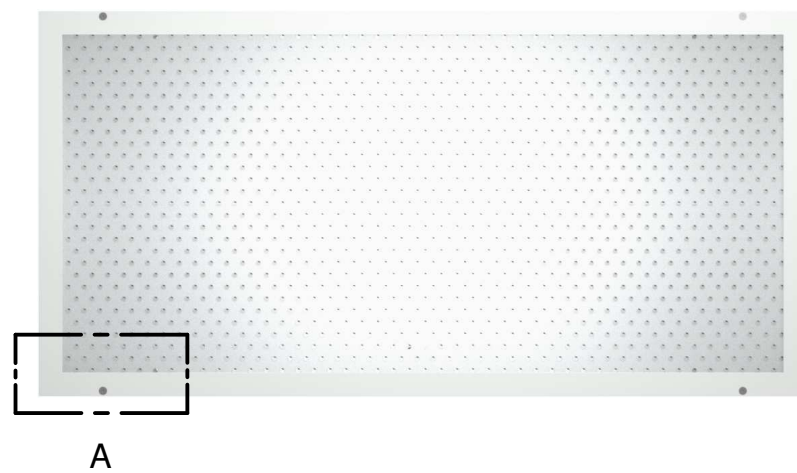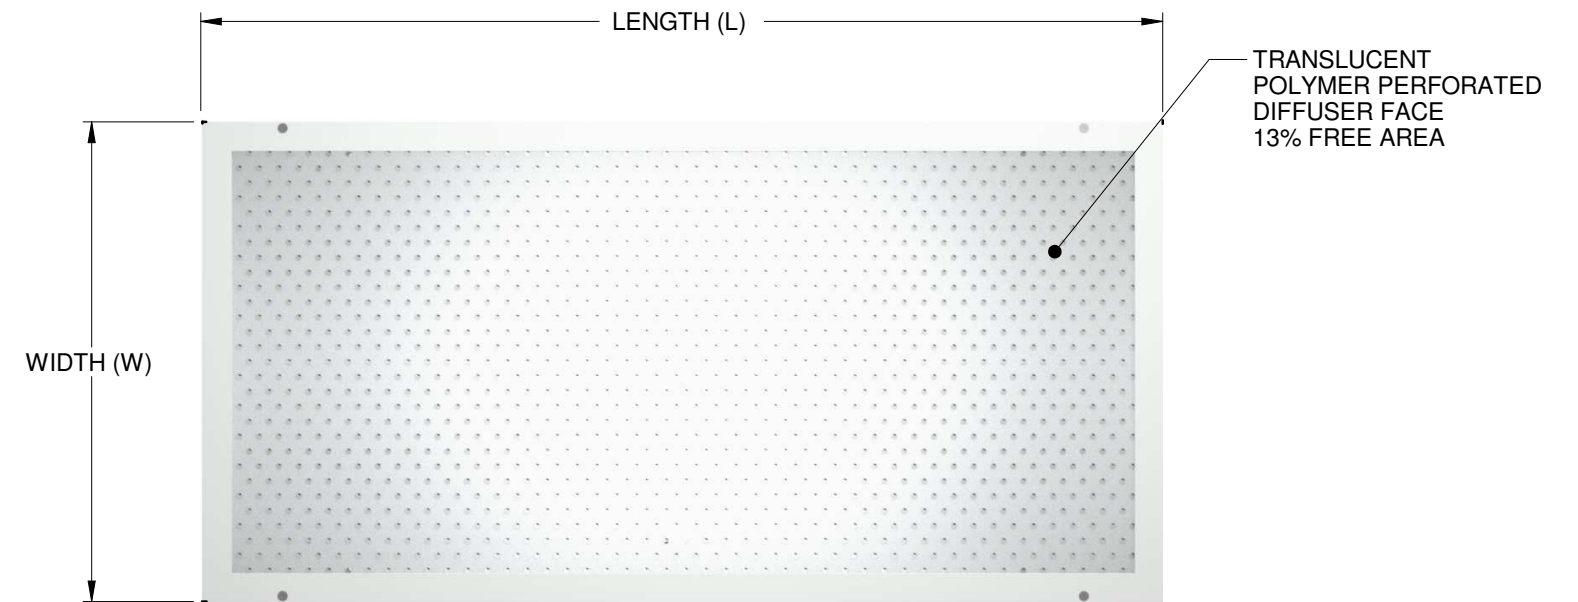

DETAIL A

USE A 5/32" ALLEN KEY TO THE COUNTERSUNK FLAT HEAD SCREWS TO REMOVE THE PLASTIC DIFFUSER FACE (x 4)

PRICE | **CRITICAL ENVIRONMENTS**

PROJECT:

271927

Revision: B

02-03-2022


UCA

ULTRA COMPONENTS AND ACCESSORIES SUPPORTING CONTENT




CATALOGS & LITERATURE

USA ULTRASUITE CATALOG
FFU FAN FILTER UNIT CATALOG
LFD LAMINAR FLOW DIFFUSER CATALOG
USA ULTRASUITE BROCHURE
USA ULTRASUITE CASE STUDY LIBRARY



SUBMITTALS

USA ULTRASUITE SUBMITTAL
UFFU ULTRA FAN FILTER UNIT WITH INTEGRATED LED LIGHTING SUBMITTAL
ULFD ULTRA LAMINAR FLOW DIFFUSER WITH INTEGRATED LED LIGHTING SUBMITTAL




MANUALS

UCA ULTRA COMPONENTS AND ACCESSORIES MANUAL
USA ULTRASUITE MANUAL
URDC ULTRA DRIVER CABINET MANUAL



WEBSITE

FOR MORE INFORMATION ON PRICE ULTRASUITE, VISIT PRICEINDUSTRIES.COM



VIDEOS

USA ULTRASUITE INSTALLATION TIME LAPSE VIDEO
USA ULTRASUITE LAUNCH VIDEO
USA SMOKE TEST VIDEO
LIGHTING STANDARDS IN OPERATING ROOMS AND CLEANROOMS VIDEO

PRICE | **CRITICAL ENVIRONMENTS**

PROJECT:

271927

Revision: B

02-03-2022