


**LG - Lattice Face Grille**

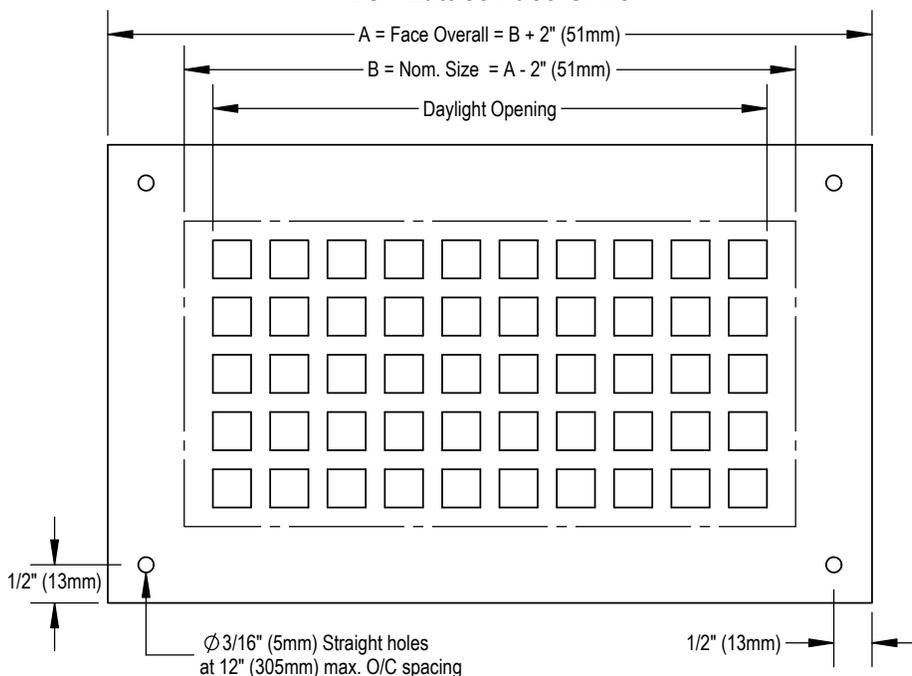

**Material:**

- STL - 14 ga. Steel
- AL - 14 ga. Aluminum
- SS - 20 ga. 304 Stainless steel

**Sizing:**

- Actual Size: Ordered size = A
- Nominal Size : Ordered size = B

**Hole Pattern:**


- 50: 1/2" (13mm) square holes with 1/4" (6mm) fret
- 75: 3/4" (19mm) square holes with 1/4" (6mm) fret
- 100: 1" (25mm) square holes with 1/4" (6mm) fret
- 250: 2" x 1/2" (51mm x 13mm) rectangular holes with 1/4" (6mm) fret
- 187: 1 7/8" x 3/8" (48mm x 10mm) rectangular holes with 1/8" (3mm) fret

**Fastening:**

- 0 - No fastening holes
- H - Straight holes

**Damper:**

- VCS3 - Coated steel opposed blade damper, mill finish
  - Min.: 6" x 3" (152mm x 76mm)
  - Max.: 24" x 18" (610mm x 457mm)
  - Nom. sizing only
  - Not applicable for stainless steel (SS)

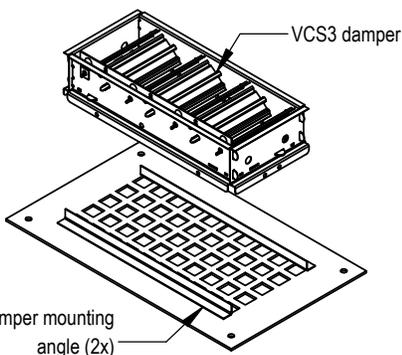

**Finish:**

- Standard Finish:
- B12 - Standard White
  - #4 - Brushed Stainless Steel (for stainless steel construction)

Optional finishes available:

- Optional colors
- Custom colors
- See finishes brochure for additional information.
- Contact your Price representative for leadtimes and pricing

• Available Sizes:

- Minimum size:  
 6" x 5" (152mm x 127mm) - Actual Size  
 4" x 3" (102mm x 76mm) - Nominal Size
- Maximum size:  
 74" x 26" (1880 x 660mm) - Actual Size  
 72" x 24" (1829 x 610mm) - Nominal size

**Notes:**

- Daylight opening will be calculated to suit overall dimension with a minimum 1" (25mm) border as standard
- Factory tolerance: ±1/32" (1mm)



Scan for link to additional product information

ALL METRIC DIMENSIONS ( ) ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER

<b>PROJECT:</b>		<b>PRICE</b> <sup>®</sup>	
<b>ENGINEER:</b>			
<b>CUSTOMER:</b>		<b>275799</b>	
<b>SUBMITTAL DATE:</b>	<b>SPEC. SYMBOL:</b>	<b>2023-09-15</b>	